




**Hex Washer Head
Type 17 Point
Dagger-Guard Coating™**

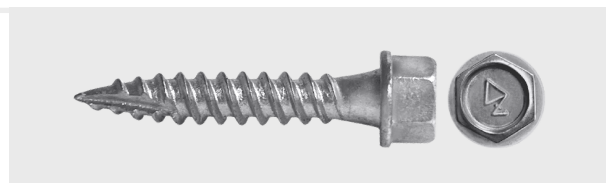

Size	TPI	Part #	QTY / Carton	Drive
9 x 1"	15	DAGCTWOW0910T17	4,000	1/4" Hex
9 x 1-1/2"	15	DAGCTWOW09112T17	2,500	1/4" Hex
9 x 2"	15	DAGCTWOW0920T17	2,000	1/4" Hex
9 x 2-1/2"	15	DAGCTWOW09212T17	1,500	1/4" Hex
9 x 3"	15	DAGCTWOW0930T17	1,000	1/4" Hex

material: C1022 Low Carbon Steel, Core Hardness: HV240-425

finish: Dagger-Guard Coating™ is a three layer, multi step dip/spin/bake process which provides 1000 hour salt spray corrosion resistance

application: Metal to wood applications

installation: Screw gun with depth sensitive nosepiece with installation speed not to exceed 2500 RPM. Overdriving may result in fastener failure or strikeout of the work surface. The fastener is fully seated when the head's bearing surface is flush with the material being attached. The use of impact drivers is not recommended, as they can strip or break the screw.

Meet or exceeds the following specifications:

ASTM A510	Specification for general requirements for carbon steel wire rods (Minimum grade 1018)
ASTM B117	Standard practice for operating salt spray (fog) apparatus
ASTM C1002	Specification for steel self-piercing tapping screws for application of gypsum panel products or metal plaster based to wood or steel studs
ASTM F1941	Specification for electrodeposited coatings on threaded fasteners

Ultimate Values								
	Diameter	3/4" Particle Board	2 x 4 Redwood	2 x 4 Fir	25 Gauge	22 Gauge	20 Gauge	Minimum Torsional Strength (lb)
Tension (lb) Pullout	#9	266	206	398	149	196	367	39
Shear (lb) Bearing	#9	-	-	-	337	591	829	39

DAGCTWOW | Revision 1.0 | 09.15.25