DAGGERZ™

INTERNATIONAL FASTENERS, INC.

Hex Washer Head with EPDM Bonded Washer
Type 17 Point
304 Stainless Steel

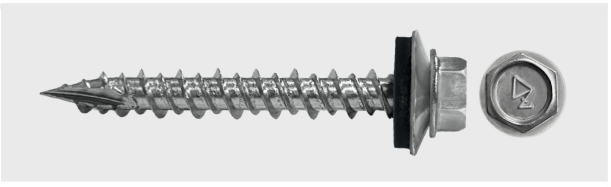

Size	TPI	Part #	QTY / Carton	Drive
10 x 1-1/2"	14	DAGSSS10112T17	2,500	1/4" Hex

material: 304 Stainless Steel

application: Light metal exterior applications

installation: Screw gun with depth sensitive nosepiece with installation speed not to exceed 2500 RPM. Overdriving may result in fastener failure or strikeout of the work surface. The fastener is fully seated when the head's bearing surface is flush with the material being attached. The use of impact drivers is not recommended, as they can strip or break the screw.

Meet or exceeds the following specifications:

MIAMI-DADE COUNTY APPROVED

ASME B 18.6.1	Standard specification for wood screws
ASTM A276	Standard specification for stainless steel bars and shapes
ASTM B117	Standard practice for operating salt spray (fog) apparatus

Ultimate Values

	Diameter	2 x 4 Fir	25 Gauge	20 Gauge	Minimum Torsional Strength (lb)
Tension (lb) Pullout	#10	428	173	363	56
Shear (lb) Bearing	#10	-	397	834	56

These figures are offered only as a guide and are not guaranteed in any way by International Fasteners, Inc. Appropriate safety factors should be applied to these values for specific purposes. All International Fasteners, Inc. fasteners are manufactured to International Fasteners, Inc.'s performance specifications and print drawings.