




**Square-Phillips Pancake Head
Type 17 Point
302 Stainless Steel**

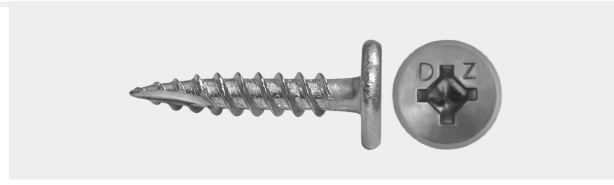

Size	TPI	Part #	QTY / Carton	Drive
10 x 1"	13	LOPROT17GPSSS1010	5.000	#2 Square-Phillips
10 x 1-1/2"	13	LOPROT17GPSSS10112	2.000	#2 Square-Phillips
10 x 2"	13	LOPROT17GPSSS1020	2.000	#2 Square-Phillips

material: 302 Stainless Steel

application: Light metal exterior applications

installation: Screw gun with depth sensitive nosepiece with installation speed not to exceed 2500 RPM. Overdriving may result in fastener failure or strikeout of the work surface. The fastener must penetrate beyond the metal with a minimum of three threads protruding past the back side. The use of impact drivers is not recommended, as they can strip or break the screw.

Meet or exceeds the following specifications:



- ASTM A276** Standard specification for stainless steel bars and shapes
- ASTM B117** Standard practice for operating salt spray (fog) apparatus
- ASTM C1002** Specification for steel self-piercing tapping screws for application of gypsum panel products or metal plaster bases to wood or steel studs

Ultimate Values

	Diameter	25 Gauge	20 Gauge	3/4" Particle Board	2 x 4 Fir	Minimum Torsional Strength (lb)
Tension (lb) Pullout	#10	173	397	649	547	56
Shear (lb) Bearing	#10	363	834	-	-	56

LOPROT17GPSSS | Revision 1.1 | 04.08.26