DAGGERZ™

INTERNATIONAL FASTENERS, INC.

Hex Washer Head
Self Drill Point
305 Stainless Steel

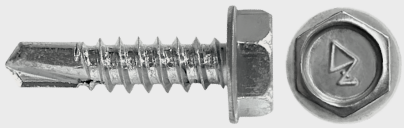

Size	TPI	Part #	QTY / Carton	Drive	Drill Point	Max Drill
8 x 1/2"	18	SDSSS080012	10,000	1/4" Hex	#2	0.112"
10 x 3/4"	16	SDSSS10034	5,000	5/16" Hex	#3	0.175"
12 x 3/4"	14	SDSSS12034	5,000	5/16" Hex	#3	0.210"
14 x 3/4"	14	SDSSS14034	2,500	3/8" Hex	#3	0.220"

material: 305 Stainless Steel

application: Light metal applications in harsh environmental conditions

installation: Screw gun with depth sensitive nosepiece with installation speed not to exceed 1000 RPM. Overdriving may result in fastener failure or strikeout of the work surface. The fastener must penetrate beyond the metal with a minimum of three threads protruding past the back side. The use of impact drivers is not recommended, as they can strip or break the screw.

Meet or exceeds the following specifications:

ASTM A276	Standard specification for stainless steel bars and shapes
ASTM B117	Standard practice for operating salt spray (fog) apparatus
SAE J78	Standard for dimensional, mechanical, and performance requirements

These figures are offered only as a guide and are not guaranteed in any way by International Fasteners, Inc. Appropriate safety factors should be applied to these values for specific purposes. All International Fasteners, Inc. fasteners are manufactured to International Fasteners, Inc.'s performance specifications and print drawings.