




High Hex Washer Head with Serrations
Self Drill Point
Zinc Plated

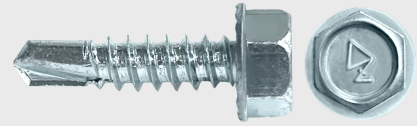

Size	TPI	Part #	QTY / Carton	Head Height	Drive	Drill Point	Max Drill
10 x 3/4"	16	SDZ10034MAXS	6,000	0.139" - 0.155"	5/16" Hex	#3	0.175"
10 x 1"	16	SDZ1010MAXS	3,000	0.139" - 0.155"	5/16" Hex	#3	0.175"
10 x 1-1/2"	16	SDZ10112MAXS	2,500	0.139" - 0.155"	5/16" Hex	#3	0.175"

material:	C1022 Low Carbon Steel, Core Hardness: HV240-425
finish:	Zinc plating provides 24 hour minimum salt spray corrosion resistance
application:	Metal to metal applications
installation:	Screw gun with depth sensitive nosepiece with installation speed not to exceed 2500 RPM. Overdriving may result in fastener failure or strikeout of the work surface. The fastener must penetrate beyond the metal with a minimum of three threads protruding past the back side. The use of impact drivers is not recommended, as they can strip or break the screw.

Meet or exceeds the following specifications:		ICC ESR-4229	ICC ES
AC118	ICC-ES Acceptance Criteria for tapping screw fasteners used in steel-to-steel connections		
ASTM A510	Specification for general requirements for carbon steel wire rods (Minimum grade 1018)		
ASTM B117	Standard practice for operating salt spray (fog) apparatus		
ASTM C1513	Specification for steel tapping screws for cold-formed steel framing connections		
SAE J78	Standard for dimensional, mechanical, and performance requirements		

Ultimate Values							
	Diameter	20 Gauge	18 Gauge	16 Gauge	14 Gauge	12 Gauge	Minimum Torsional Strength (lb)
Tension (lb) Pullout	#10	389	554	727	1050	1216	61
Shear (lb) Bearing	#10	811	1223	1492	1545	1650	61

SDZMAXS | Revision 1.0 | 10.03.25