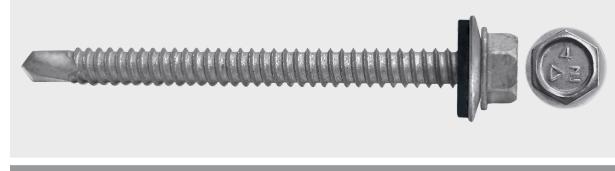


**Hex Washer Head with EPDM Bonded Washer****Self Drill Point****410 Stainless Steel Dagger-Guard Coating™**

Size	TPI	Part #	QTY / Carton	Drive	Drill Point	Max Drill
14 x 3"	14	NEOSDSSCT1430	500	3/8" Hex	#3	0.220"
14 x 4"	14	NEOSDSSCT1440	500	3/8" Hex	#3	0.220"
14 x 5"	14	NEOSDSSCT1450	500	3/8" Hex	#3	0.220"
14 x 6"	14	NEOSDSSCT1460	500	3/8" Hex	#3	0.220"
14 x 7"	14	NEOSDSSCT1470	250	3/8" Hex	#3	0.220"
14 x 8"	14	NEOSDSSCT1480	250	3/8" Hex	#3	0.220"

material: 410 Stainless Steel, Case Hardness: HV500 minimum**finish:** Dagger-Guard Coating™ is a three layer, multi step dip/spin/bake process which provides 1000 hour salt spray corrosion resistance**application:** Metal to metal applications**installation:** Screw gun with depth sensitive nosepiece with installation speed not to exceed 1800 RPM. Overdriving may result in fastener failure or strikeout of the work surface. The fastener must penetrate beyond the metal with a minimum of three threads protruding past the back side. The use of impact drivers is not recommended, as they can strip or break the screw.**Meet or exceeds the following specifications:****ASTM A276** Standard specification for stainless steel bars and shapes**ASTM B117** Standard practice for operating salt spray (fog) apparatus**ASTM C1513** Specification for steel tapping screws for cold-formed steel framing connections**ASTM F1941** Specification for electrodeposited coatings on threaded fasteners**SAE J78** Standard for dimensional, mechanical, and performance requirements**Ultimate Values**

	Diameter	20 Gauge	18 Gauge	16 Gauge	14 Gauge	12 Gauge	3/16"	7/32"	Minimum Torsional Strength (lb)
Tension (lb) Pullout	#14	300	402	776	1057	1477	3941	4656	156
Shear (lb) Bearing	#14	797	1083	1942	2300	2754	-	-	156

NEOSDSSCT | Revision 1.0 | 09.22.25